
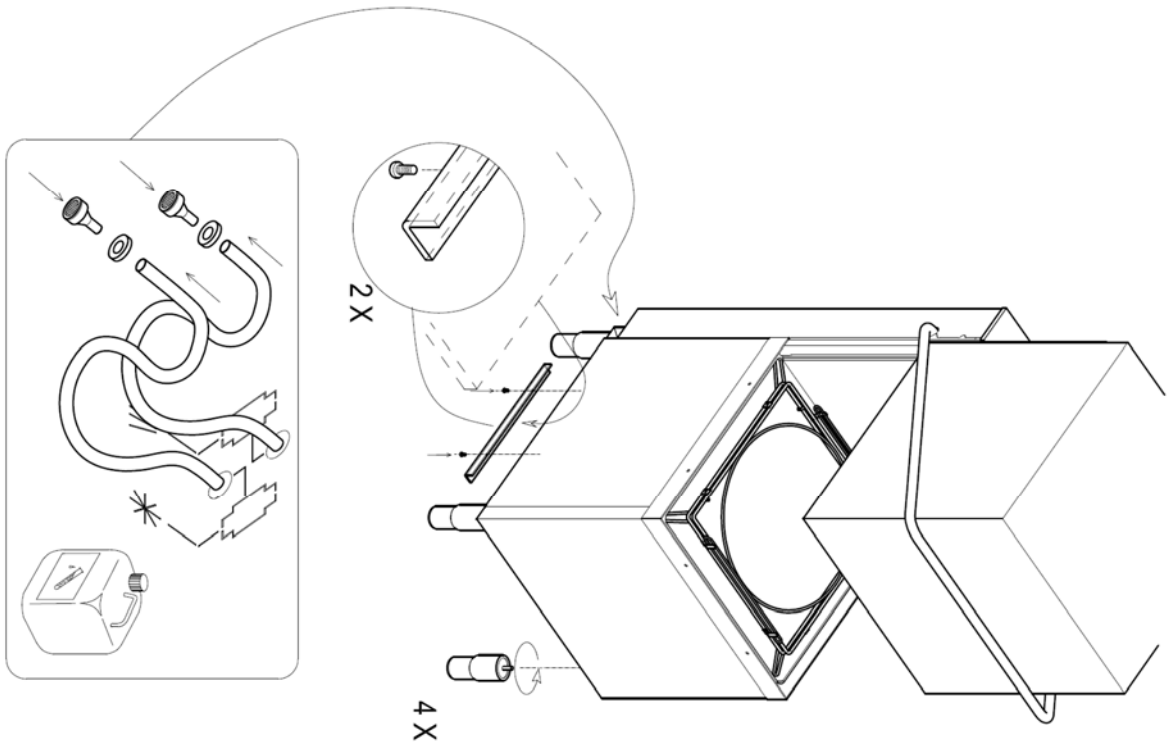
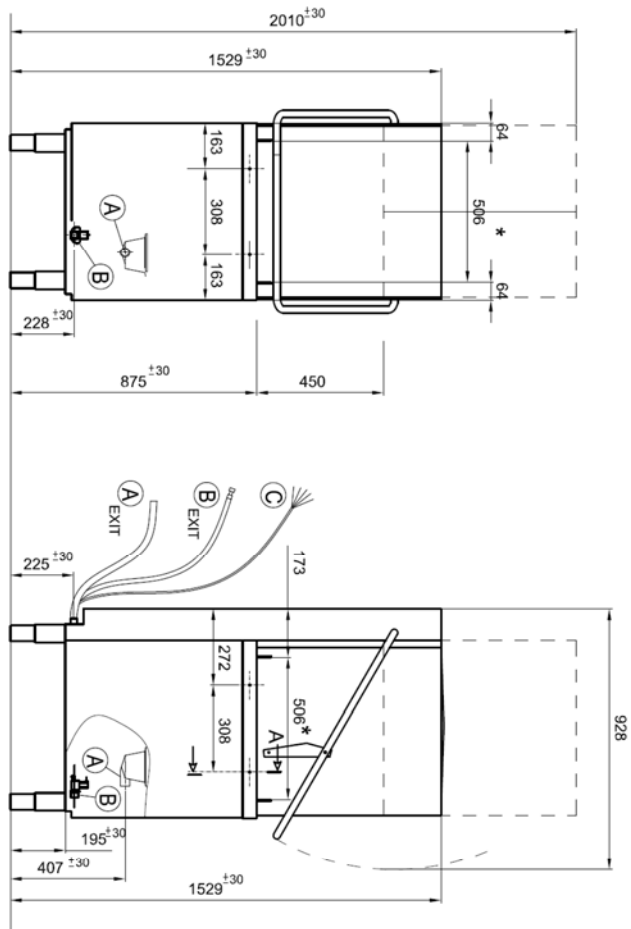
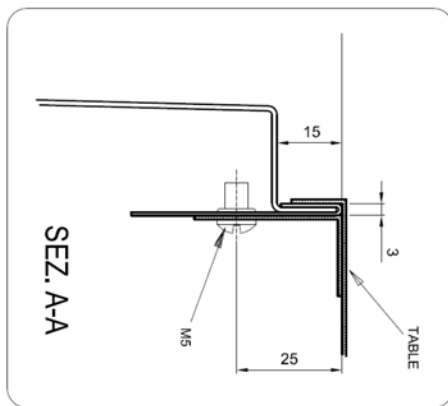


	Model	Lavamax 1200E	
	Code Production	GH50NTHZ23SS	
Interface :			
			
			
	Overall Dimension (Width-Depth-Height) *open	mm	724x818x1529(2010*)
	Packaging Dimension (WxDxH)	mm	760x840x1520
	Gross weight	Kg	120
	Net weight	Kg	110
	Volume	mc	0,97
	Rack size	mm	500x500
	Max door /hood opening	mm	450
	Max glasses/plate Height	mm	425/440
	General construction		double skin
	Door/hood Construction		single skin
	Tank construction		deep drawn
	Tank volume	liter	20
	Tank heating element	W	2.500
	Tank surface strainers		yes -composite
	Wash pump type		double flow
	Wash pump power	W	700
	Wash temperature	°C	60
	Boiler type		pressurized
	Boiler volume	liter	6
	Back-flow system		valve
	Boiler heating element	W	8.000
	Rinse booster pump		no
	Rinse booster pump power	W	-
	Rinse temperature	°C	80
	Rinse water consumption	Liter /rack	2,1
	Optimal external water pressure	bar	2 - 4
	Drain system		overflow
	Drain pump		optional
	Rinse aid dispenser		yes
	Detergent dispenser		optional
	Wash cycle	sec	60 - 120 - 150 - continuous
	Water softner	Continuous type	no
	Electric Power	W	8.700
	Electric Connection	V - ph - Hz	230V 3 60Hz
	Fuse	A	25
	Plates racks	Nr1	780131
	Flat Rack	Nr1	780132
	Cutterly Rack	Nr1	780139
	Electric cable		yes
	Drain hose		yes
	Fill hose		yes

A		Ø 35 mm M	A		Ø 35 mm M
B		G 3/4" M	B	EXT	G 3/4" F
C		Power supply			

* LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE UTILE POUR PANIER
NUTZBARE OFFNUNG FÜR KORBE
ABERTURA UTIL PARA CESTO

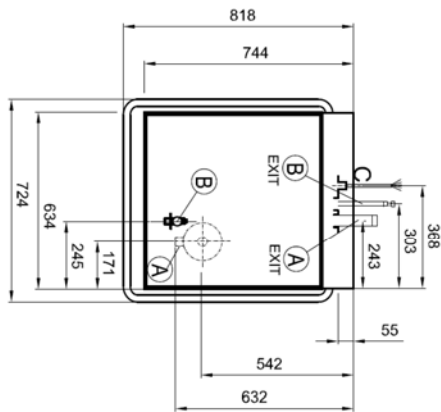

Installation layout		Hood type			
M.P.U.C.O.				GH50	
Designed by:	Date:			Code:	Rev.:
	30.09.2014				00
Determination:					
					